


Clean Removal Duct Tape

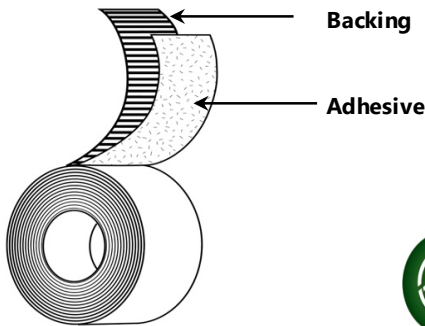

Backing:	PE Coated Cloth
Adhesive:	Rubber
Liner:	N/A
Colors:	Slate Blue, Red
Standard Sizes:	48mm x 55m, 72mm x 55m

Applications

- Multiple uses in powerplants and on ships
- Heavy-duty packaging and bundling
- Color coding
- Media-blast protection
- Holding dosimeters, securing clothing and gloves, wrapping pipe ends, insulation & duct sealing

Features

- PE-Coated Cloth Backing
- Natural Rubber-Based Adhesive

Benefits

- High tensile strength for difficult applications
- Abrasion and puncture resistant
- Crisp, straight tear
- UV resistant for 6 months
- Aggressive adhesion - including adhesion to extremely rough materials
- Clean removal with little or no residue for up to 6 months from most surfaces

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	11.5 mils	0.290 mm	ASTM D-1000
Adhesion to Steel	80 oz/in	8.85 N/cm	PSTC-101
Tensile Strength	26 lb/in	46.00 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
Adhesion to Backing	45 oz/in	5.00 N/cm	PSTC-101
Flame Spread Index	15		ASTM E84
Smoke Developed Index	30		ASTM E84

Recommended Storage Conditions: 60-80 °F at 40-60% RH
Standard Shelf Life (at 25 °C): 36 months from date of manufacture.