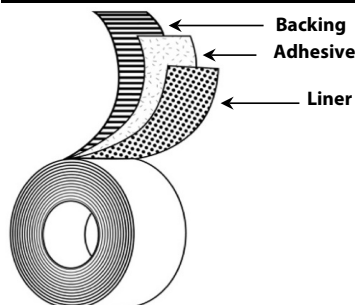


DS-SUPERGRIP-LD

White SuperGrip Tape - 4" x 100' 15mil


Backing: Low Permeability PE Film

Adhesive: Rubber

Liner: White Kraft Paper

Colors: White

Specifications: N/A

Standard Sizes: 4in x 100ft

Applications

- Secure/seal vapor barrier materials for concrete walls and floors
- Sealing heavy-duty floor covering and protection materials
- Waterproof patch and repair applications on sheet metal, aluminum, copper, PVC, plastic sheeting, tarps, pool liners, and more
- Waterproof bundling

Features

- Polyethylene Film Backing
- Rubber Adhesive
- Kraft Paper Liner

Benefits

- Tough and durable
- Exceptional vapor barrier properties
- Conformable
- Bonds to a variety of surfaces both underwater and out-of water
- Remains pliable - doesn't dry, harden, or crack
- Initially repositionable - forms permanent bond
- Forms permanent, water-tight bond
- Excellent all-temperature performance
- Easy to remove and use

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness (w/o liner)	15.0 mils	0.381 mm	ASTM D-1000
Adhesion to Steel	172 oz/in	18.82 N/cm	PSTC-101
Adhesion to Backing	170 oz/in	18.60 N/cm	PSTC-101
Tensile Strength	27 lb/in	47.28 N/cm	ASTM D-1000
Elongation	726%		
Permeance	0.03 Perms		ASTM F1249
Installation Temperature	30 to 140 °F	-1 to 60 °C	
Operating Temperature	-30 to 165 °F	-34 to 74 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 12 months from date of manufacture.